

08/16/00

08-18-00

A

08/16/00
JCS01 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

JCS01 U.S. PTO
09/640479
08/16/00

Docket No. : 40056/DBP/Y35
Inventor(s) : Kyung-Su Park
Title : VACUUM FLUORESCENT DISPLAY
Express Mail Label No. : EL366457797US

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Date: August 16, 2000

1. X **FEE TRANSMITTAL FORM** (Submit an original, and a duplicate for fee processing).

2. **IF A CONTINUING APPLICATION**

___ This application is a ___ of patent application No. .

___ Prior application information: Examiner ; Group Art Unit:

___ This application claims priority pursuant to 35 U.S.C. §119(e) and 37 CFR §1.78(a)(4),
to provisional Application No. .

3. **APPLICATION COMPRISED OF**

Specification

12 Specification, claims and Abstract (total pages)

Drawings

3 Sheets of drawing(s) (FIGS. 1 to 5)

Declaration and Power of Attorney

X Newly executed
___ Unexecuted declaration
___ Copy from a prior application (37 CFR 1.63(d))(for continuation and divisional)

4. ___ **Microfiche Computer Program** (Appendix)

5. ___ **Nucleotide and/or Amino Acid Sequence Submission** (if applicable, all necessary)

___ Computer Readable Copy
___ Paper Copy (identical to computer copy)
___ Statement verifying identity of above copies

6. **ALSO ENCLOSED ARE**

___ Preliminary Amendment
___ A Petition for Extension of Time for the parent application and the required fee are
enclosed as separate papers
___ Small Entity Statement(s)
___ Statement filed in parent application, status still proper and desired
___ Copy of Statement filed in provisional application, status still proper and desired

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.: 40056/DBP/Y35


- ☒ An Assignment of the invention with the Recordation Cover Sheet and the recordation fee are enclosed as separate papers
- ☐ This application is owned by pursuant to an Assignment recorded at Reel , Frame
- ☐ Information Disclosure Statement (IDS)/PTO-1449
- ☐ Copies of IDS Citations
- ☒ Certified copy of Priority Document(s) (*if foreign priority is claimed*)
- ☐ English Translation Document (*if applicable*)
- ☒ Return Receipt Postcard (MPEP 503) (should be specifically itemized).
- ☐ Other

7. CORRESPONDENCE ADDRESS

CHRISTIE, PARKER & HALE, LLP, P.O. BOX 7068, PASADENA, CA 91109-7068

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By 
D. Bruce Prout
Reg. No. 20,958
626/795-9900

DBP/aam

VACUUM FLUORESCENT DISPLAY

BACKGROUND OF THE INVENTION

(a) Field of the Invention

The present invention relates to vacuum fluorescent displays (VFDs),
5 and more particularly, to improvements allowing a higher efficiency of electron
function to enhance the display quality.

(b) Description of the Related Art

In recent years, VFDs, utilizing phosphor display elements to form a
viewed alphanumeric or graphic image, have come into wide use as displays in
10 electronic and electrical appliances.

A typical vacuum fluorescent display device comprises a transparent
evacuated envelope containing a plurality of anodes arranged in a pattern of
desired light emission, each anode being coated with a fluorescent layer for
emitting light when excited, a heated filament serving as a source of electrons,
15 and control grids located between the filament and the anodes for determining
which anodes can be excited by the electrons. When the anodes and the
control grids are at a high voltage and the filament is at a lower voltage the
electrons can excite the phosphor layer on the anodes to cause light emission
from the anodes.

20 Referring to Fig. 5, a conventional VFD will be described. An
evacuated envelope is sealed with a face glass 2, a base substrate 4 and side
glasses 6. The base substrate 4 comprises a wiring layer (not shown) covered

with an insulating layer 8. A conducting layer 12 (anode) is formed on the insulating layer 8 and provided with a positive potential through a conducting wire 10. A phosphor layer 14 is deposited on the conducting layer 12.

A plurality of filamentary cathodes 18 is located in the envelope spaced with the anode 12 and is heated to thermionically emit the electrons. Control grids 16 are located between the anode 12 and the cathode 18 to accelerate the emitted electrons.

In the VFD shown in Fig. 5, or other similar triode vacuum tubes, the filament is heated, such as by an AC current, to a temperature at which it will emit electrons. The control grids, biased at a positive potential, accelerate electrons emitted from the filament toward the anode, which is also biased higher than the filament. On the anode, the phosphor layer emits light in response to the bombardment of electrons emitted from the filament and accelerated by the control grid to the anode.

Since only those electrons that pass through a positive control grid can reach the anode, some electrons that do not pass are absorbed by the control grid. That is, since only some of the emitted electrons impinge on the phosphor layer for lighting, the efficiency of electron function is not optimal, and this results in a degradation of the brightness of the display.

Further, when the control grids are hit by the electrons, they may be heated by additional currents and suffer thermal deformation. Even if the spaces between grids are partially shifted, stains or spots on the display pattern will result.

Because the control grids as well as the anode are formed on the base substrate, the design of VFDs may be restricted by space availability. The components comprising grids and anodes are formed on the base substrate, and it subsequently takes a long time to manufacture a VFD.

SUMMARY OF THE INVENTION

In view of the prior art described above, it is an object of the present invention to provide a vacuum fluorescent display capable of reducing the absorption of electrons by a control grid to enhance the efficiency of emitted electrons.

It is another object of the present invention to provide an improved vacuum fluorescent display having enhanced brightness and higher display quality.

To achieve these objects, as embodied and broadly described herein, the invention comprises

an evacuated envelope surrounded by a pair of substrates and side glasses;

a plurality of filamentary cathodes for emitting electrons when a negative potential is applied; and

a display unit, provided on one of the substrates in the evacuated envelope, having a positive potential applied thereto, and displaying a predetermined image in response to the electrons emitted from the plurality of filamentary cathodes;

an electron control unit for generating a repulsive electric field to allow acceleration of the electrons emitted from the plurality of filamentary cathodes in the direction of the display unit.

A negative potential is applied to the electron control unit. The electron control unit may be a plurality of grids that are shaped as a mesh, or it may be a layer of a transparent electrically conductive material such as tin doped indium oxide (ITO) deposited on the other substrate.

According to another aspect of the present invention, a VFD further comprises a control electrode, located around the electron emissive means, for controlling the trajectories of the electrons emitted from the electron emissive means.

Both the foregoing general description and the following Detailed Description are exemplary and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings provide a further understanding of the invention and, together with the Detailed Description, explain the principles of the invention. In the drawings:

Fig. 1 shows an exploded projection of a vacuum fluorescent display according to a first preferred embodiment of the present invention;

Fig. 2 shows a cross section of a vacuum fluorescent display according to the first preferred embodiment of the present invention;

Fig. 3 shows a cross section of a vacuum fluorescent display according to a second preferred embodiment of the present invention;

Fig. 4 shows a cross section of a vacuum fluorescent display according to a third preferred embodiment of the present invention; and

Fig. 5 shows a cross section of a prior art vacuum fluorescent display.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will be described in detail with reference to the accompanying drawings.

Referring to Figs. 1 and 2, an evacuated envelope of a VFD according to the present invention is sealed with a face glass 20, a base substrate 22 and side glasses 24. The base substrate 22 comprises a wiring layer (not shown) covered with an insulating layer 26. A conducting layer 30 is formed on the insulating layer 26 and provided with a positive potential by a through hole 28. The conducting layer 30 functions as an anode. A phosphor layer 32 such as ZnO:Zn, which is fluorescent at low voltages, is deposited on the conducting layer 30, thereby forming display areas.

A plurality of filamentary cathodes 34 (referred to as filaments hereinafter) are located in the envelope with the conducting layer 30 and heated to thermionically emit electrons. Each filament, which comprises a tungsten core coated with oxides of barium, strontium and potassium, is suspended by supporting members (not shown).

An electron control unit is located between the face glass 20 and the

filament 34, to accelerate the emitted electrons to the conducting layer 30 and phosphor layer 32 through application of a negative potential. According to a first preferred embodiment of the present invention, the electron control unit is a plurality of grids 36.

5 Electrons emitted from the filament 34 are repelled from the grids 36, then accelerated to the conducting layer 30 because of the negative potential applied to the grids 36.

10 A conducting member 38 bends elastically into the grids 36 from the base substrate 22, and applies the negative potential to the grids 36. A positive potential is applied to the conducting layer 30, similar to the prior art, and further descriptions thereof will not be made.

15 In the VFD shown in Figs. 1 and 2, the filament 34 is heated, by an AC current for example, to a temperature at which it will emit electrons. The grids 36 are biased at a negative potential to accelerate electrons emitted from the filament 34 toward the anode. The grids 36 are preferably biased at a lower voltage than the filament. On the conducting layer 30, the phosphor layer 32 emits light in response to the bombardment of electrons emitted from the filament 34 and accelerated by the grids 36.

20 In order to accelerate the electrons, the electron control unit according to the present invention repels electrons by a negative potential from behind the filament while the control grids of prior art attract electrons by a positive potential from in front of the filament. Therefore, a VFD according to the present invention may increase the functional efficiency of the emitted electrons,

resulting in improvement of the brightness of the display.

Referring now to Fig. 3, a second embodiment of the present invention will be explained. The same reference numerals indicate the same elements as Fig. 2. As the description of the conducting layer 30, phosphor layer 32 and filament 34 is similar to that of the first preferred embodiment, further descriptions thereof will not be made.

An electron control unit of this second embodiment is a layer of a transparent electrically conductive material 40 which is deposited on the inner surface of the face glass 20 to act as an electrode. The transparent conductive material may be tin doped indium oxide (ITO) or similar materials. A negative potential is applied to the transparent conductive layer 40, which accelerates the emitted electrons to the conducting layer 30 and phosphor layer 32. The layer 40 of the transparent conductive material such as ITO may be less expensive to produce than grids as in the first embodiment.

Electrons emitted from the filament 34 are repelled from the transparent conductive layer 40 and accelerated to the conducting layer 30 because of the negative potential applied to the layer 40.

A conducting member 42 bends elastically into the layer 40 from the base substrate 22, and applies the negative potential to the layer 40.

Referring now to Fig. 4, a third embodiment of the present invention will be explained. The same reference numerals indicate the same elements as in Fig. 2. A vacuum fluorescent display according to the third embodiment further comprises control electrodes 50 located around the filament 34. The control

electrodes 50 are capable of controlling the diffusion or the trajectories of the emitted electrons.

It is possible to apply either a positive potential or a negative potential to the control electrodes 50, as needed. When the emitted electrons go beyond the display areas, a negative potential may be applied to the control electrodes 50 to gather the electrons into the display areas. When the emitted electrons converge locally in the display areas, a positive potential may be applied to the control electrodes 50 to diffuse the electrons uniformly. Therefore, the use of the control electrodes enhances the functional efficiency of the electrons, and minimizes bright spots around the display area.

Further, it is possible to provide control electrodes in the second embodiment although it is not shown in the drawing. That is, control electrodes may be provided around the filament in the case that the electron control unit is a transparent conductive layer such as an ITO layer deposited on the inner surface of the face glass. A negative potential applied to the ITO layer accelerates electrons emitted from the filament while either a positive or negative potential applied to the control electrodes controls the trajectories of the electrons.

As explained above, a VFD according to the present invention does not have any obstacles in the electron path to an anode, so most of the electrons emitted from a filament can reach the anode. Further, the electrons are accelerated by an electron control unit and uniformly diffused by control electrodes in the VFD, so brightness as well as display quality is much

improved.

It will be apparent to those skilled in the art that various modifications and variations can be made to the device of the present invention without departing from the spirit and scope of the invention. The present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

WHAT IS CLAIMED IS:

1. A vacuum fluorescent display comprising:

an evacuated envelope surrounded by a pair of substrates and side glasses;

5 an electron emissive means for emitting electrons when a negative potential is applied; and

10 a display means, provided on one of the substrates in the evacuated envelope, having a positive potential applied thereto and displaying a predetermined image in response to the electrons emitted from the electron emissive means;

an electron control means for generating a repulsive electric field to allow acceleration of the electrons emitted from the electron emissive means in the direction of the display means.

15 2. The vacuum fluorescent display as recited in claim 1, wherein the electron control means is mounted on the other substrate.

3. The vacuum fluorescent display as recited in claim 1, wherein a negative potential is applied to the electron control means.

4. The vacuum fluorescent display as recited in claim 2, wherein a negative potential is applied to the electron control means.

20 5. The vacuum fluorescent display as recited in claim 3, wherein the electron control means is a plurality of grids which are shaped as a mesh.

6. The vacuum fluorescent display as recited in claim 3, wherein the electron control means is a layer of a transparent electrically conductive

material.

7. The vacuum fluorescent display as recited in claim 6, wherein the transparent electrically conductive material is tin doped indium oxide (ITO).

8. The vacuum fluorescent display as recited in claim 1, further comprising:

control electrode means, located around the electron emissive means, for control of the trajectories of the electrons emitted from the electron emissive means.

9. The vacuum fluorescent display as recited in claim 8, wherein either a positive or negative potential is applied to the control electrode means.

ABSTRACT OF THE DISCLOSURE

A vacuum fluorescent display (VFD) capable of reducing the absorption of electrons by a control grid to enhance the functional efficiency of electrons is disclosed. The VFD has an evacuated envelope surrounded by a face glass, a base substrate and side glasses; a plurality of filamentary cathodes for emitting electrons when a negative potential is applied; an anode having a phosphor layer that responds to electrons emitted from the cathodes, and having a positive potential applied thereto; and electron control unit for generating a repulsive electric field that allows the acceleration of electrons emitted from the cathodes in the direction of the anode. The electron control unit may be a plurality of grids behind the cathodes, or a layer of transparent conductive material deposited on the inner surface of the face glass.

FIG. 1

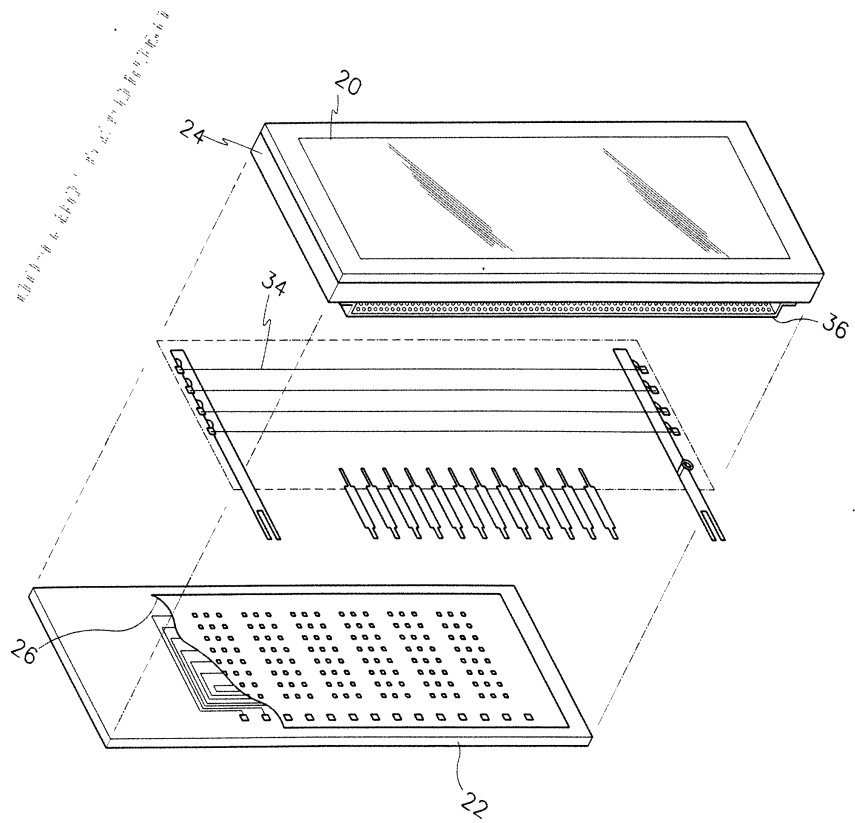


FIG.2

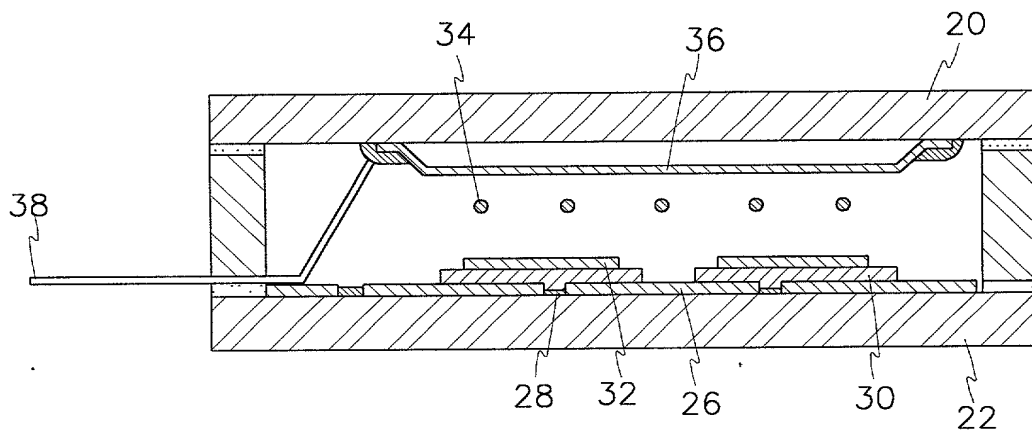


FIG.3

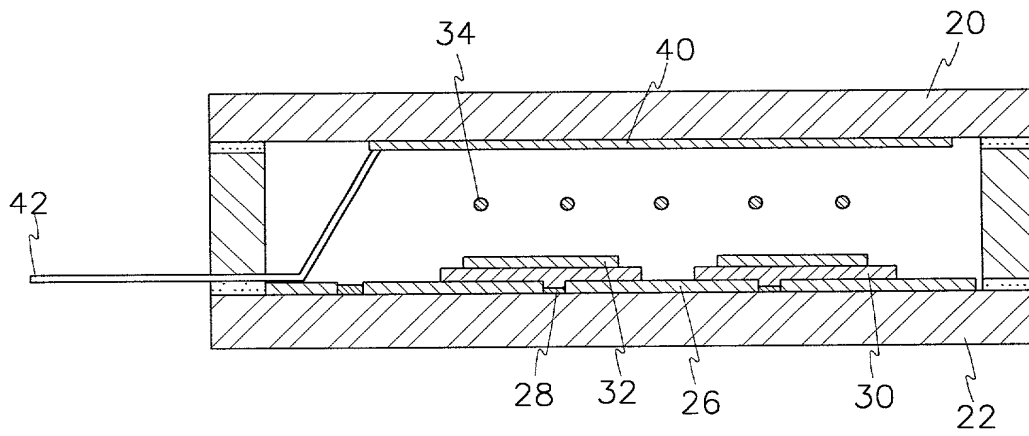


FIG.4


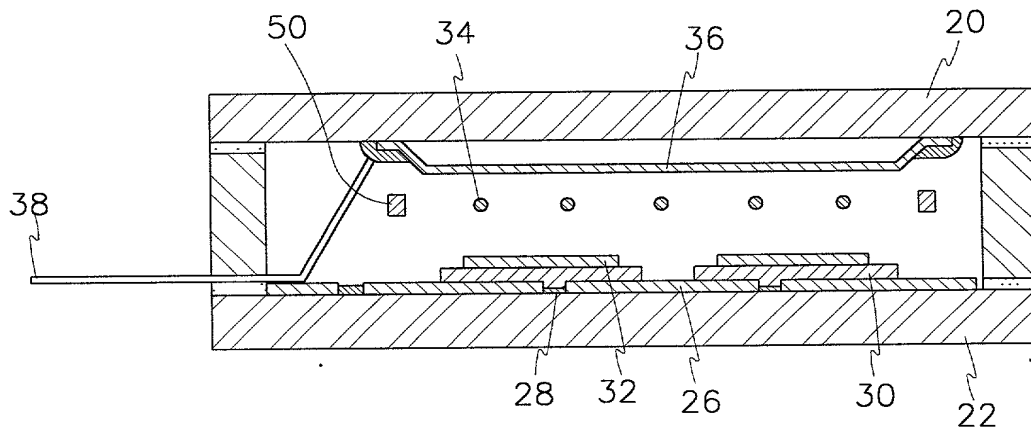


FIG.5

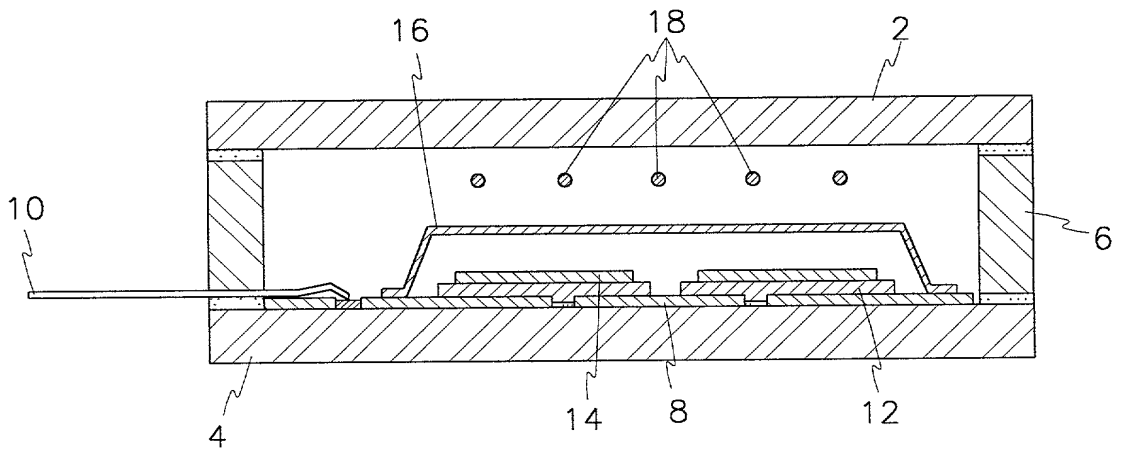

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONS**

Docket No.: 40056/DBP/Y35
Attorney : D. Bruce Prout

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled "**VACUUM FLUORESCENT DISPLAY**", the specification of which is attached hereto unless the following is checked:

Was filed on _____ As United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of the foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

| <u>Application Number</u> | <u>Country</u> | <u>Filing Date (day/month/year)</u> | <u>Priority Claimed</u> |
|---------------------------|----------------|-------------------------------------|-------------------------|
| 99-35472 | Korea | 25/08/1999 | Yes |

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

| <u>Application Number</u> | <u>Filing Date</u> |
|---------------------------|--------------------|
|---------------------------|--------------------|

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

| <u>Application Number</u> | <u>Filing Date</u> | <u>Patented/Pending/Abandoned</u> |
|---------------------------|--------------------|-----------------------------------|
|---------------------------|--------------------|-----------------------------------|

POWER OF ATTORNEY: I hereby appoint the following attorneys and agents of the law firm CHRISTIE, PARKER & HALE, LLP to prosecute this application and any international application under the Patent Cooperation Treaty based on it and to transact all business in the U.S. Patent and Trademark Office connected with either of them in accordance with instructions from the assignee of the entire interest in this application; or from the first or sole inventor named below in the event the application is not assigned; or from YOU ME PATENT & LAW FIRM in the event the power granted herein is for an application filed on behalf of a foreign attorney or agent.

009720" 62404960

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONS**

Docket No.: 40056/DBP/Y35

| | | | | | |
|------------------------|----------|-----------------------------|---------------------|---------------------|------------|
| R. W. Johnston | (17,968) | Vincent G. Gioia | (19,959) | Kathleen M. Olster | (42,052) |
| D. Bruce Prout | (20,958) | Edward R. Schwartz | (31,135) | Daniel M. Cavanagh | (41,661) |
| Hayden A. Carney | (22,653) | John D. Carpenter | (34,133) | Molly A. Holman | (40,022) |
| Richard J. Ward, Jr. | (24,187) | David A. Plumley | (37,208) | Lucinda G. Auciello | (42,270) |
| Russell R. Palmer, Jr. | (22,994) | Wesley W. Monroe | (39,778) | Norman E. Carte | (30,455) |
| LeRoy T. Rahn | (20,356) | Grant T. Langton | (39,739) | Joel A. Kauth | (41,886) |
| Richard D. Seibel | (22,134) | Constantine Marantidis | (39,759) | Patrick Y. Ikehara | (42,681) |
| Walter G. Maxwell | (25,355) | John W. Eldredge | (37,613) | Mark Garscia | (31,953) |
| William P. Christie | (29,371) | Gregory S. Lampert | (35,581) | Gary J. Nelson | (P-44,257) |
| David A. Dillard | (30,831) | Craig A. Gelfound | (41,032) | Raymond R. Tabandeh | (P-43,945) |
| Thomas J. Daly | (32,213) | Syed A. Hasen | (41,057) | Phuong-Quan Hoang | (41,839) |


The authority under this Power of Attorney of each person named above shall automatically terminate and be revoked upon such person ceasing to be a member or associate of or of counsel to that law firm.

D. Bruce Prout

DIRECT TELEPHONE CALLS TO : , 626/795-9900; 213/681-1800

SEND CORRESPONDENCE TO : CHRISTIE, PARKER & HALE, LLP, P.O. Box 7068, Pasadena, CA 91109-7068

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

| | | |
|--|--|---------------|
| Full name of sole or first joint inventor | Inventor's signature  | Date |
| Kyung-Su Park | | July 24, 2000 |
| Residence and Post Office Address | Citizenship | |
| 29/1, Puam-dong 390, Pusanjin-ku, Pusan-si, Korea | Korea | |

009280 6240950